OUTDOOR POST MOUNT FIXTURE
INSTALLATION INSTRUCTIONS

Please read carefully and save these instructions, as you may need them at a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL

All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Place the fixture on the top of the POST (1) in which the fixture is to be mounted to, and position as desired. Using the holes located on the POST CAP (7) mark the hole positions on the POST (1). Remove the fixture from the POST (1) and drill a 1/8" diameter hole at each marked position on the POST (1).

2. Pull the power supply wires out from the POST (1) and the fixture lead wires out from the POST CAP (7), and attach the wires together by connecting BLACK TO BLACK (2) and WHITE TO WHITE (3). Attach the POWER SUPPLY GROUND WIRE (5) to the FIXTURE GROUND WIRE (4) using a wire connector rated for the size of wires being connected.

3. Place the connected wires inside the POST (1) and mount the POST CAP (7) in place, aligning the holes in the POST CAP (7) with the ones on the POST (1). Secure the POST CAP (7) to the POST (1) using #10 x 1/2" long self-tapping SHEET METAL SCREWS (6) provided.

4. Screw a light bulb that does not exceed the maximum wattage specified on the fixture label into the SOCKET (not shown). Slide the CAGE / GLASS DIFFUSER ASSEMBLY (not shown) over the SOCKET (not shown). Secure it in place using the provided DECORATIVE SCREWS (not shown). Slide the HOOD ASSEMBLY (not shown) onto the CAGE / GLASS DIFFUSER ASSEMBLY (not shown). Secure it in place using the provided DECORATIVE SCREWS (not shown).

INSTALLATION IS NOW COMPLETED

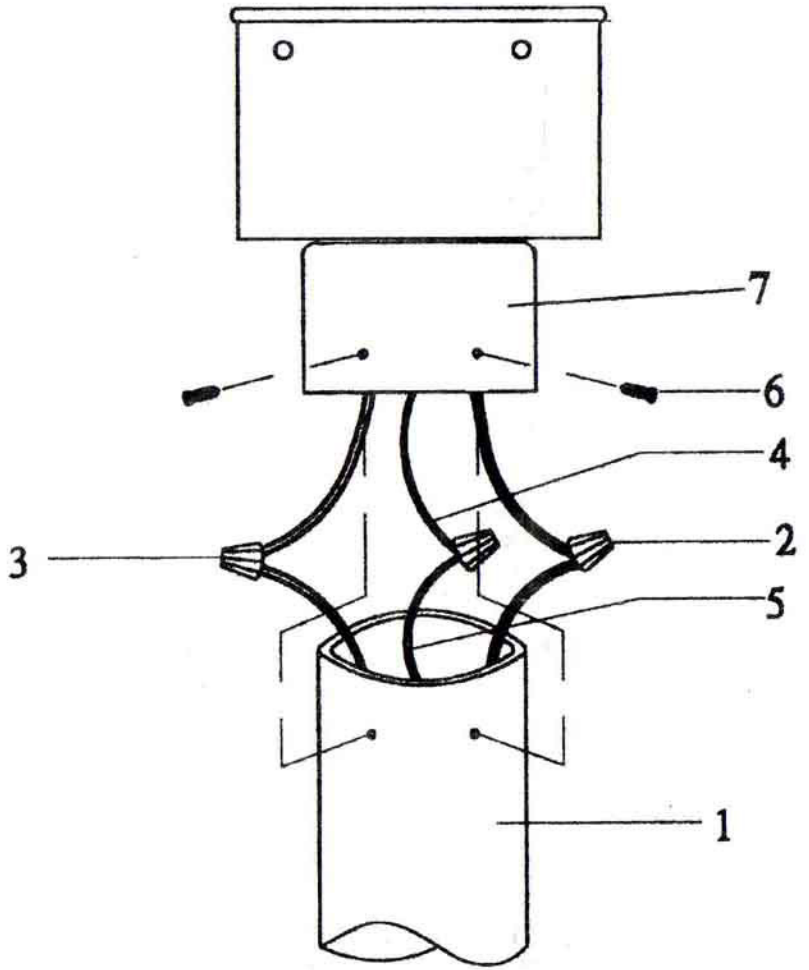

1. POST
2. BLACK TO BLACK (WIRE CONNECTION)
3. WHITE TO WHITE (WIRE CONNECTION)
4. FIXTURE GROUND WIRE
5. POWER SUPPLY GROUND WIRE
6. SHEET METAL SCREW
7. POST CAP

INSTRUCCIONES DE INSTALACION PARA LAMPARA DE POSTE

Por favor, lea cuidadosamente y guarde estas instrucciones, ya que puede necesitarlas posteriormente.

PRECAUCION

Desactive la electricidad del cortacircuitos antes de empezar la instalación de la lámpara para evitar una descarga eléctrica.

INFORMACION GENERAL

Todas las conexiones eléctricas deben realizarse conforme al Código Eléctrico Nacional y a los códigos eléctricos locales. La instalación eléctrica debe ser realizada por un electricista cualificado.

Retire la lámpara y el paquete de instalación de la caja y verifique que cuenta con todas las partes que figuran en la ilustración de la hoja de instrucciones.

MONTAJE E INSTALACION

1. Coloque y posecione la lámpara sobre la parte tubular del poste (1), usando los agujeros de la copa (7) de la lámpara, marque las posiciones de cada agujero, remueva la lámpara del poste (1) y taladre un agujero de 0.3175cm (1/8" de pulgada) en cada posición marcada.

2. Hale los alambres de corriente eléctrica del poste (1) y los alambres de la lámpara de la parte de la copa (7), una el alambre negro con negro (2), blanco con blanco (3), y los alambres de tierra (4 & 5) y utilize conectores para cerrar las puntas de los alambres.

3. Coloque los alambres dentro del poste (1), monte la lámpara sobre el poste y alínie la copa (7) de la lámpara sobre los agujeros del poste (1), asegure la copa (7) contra el poste (1) usando los tornillos de montaje (6) #10 x 1/2 de pulgada de largo proveidos.

4. Enrosque la bombilla(s) o focos que no excedan el máximo de vatios especificados en la etiqueta de la lámpara, localizada en el interior de la boquilla (no visible). Deslice la armazón / vidrio ensamblado por encima de la boquilla (no visibles) y fijelo en su lugar usando los tornillos decorativos provistos (no visibles). Deslice la capota ensamblada (no visible) sobre la armazón / vidrio ensamblado (no visible) y fijelo en su lugar usando los tornillos decorativos provistos (no visibles).

LA INSTALACION HA FINALIZADO

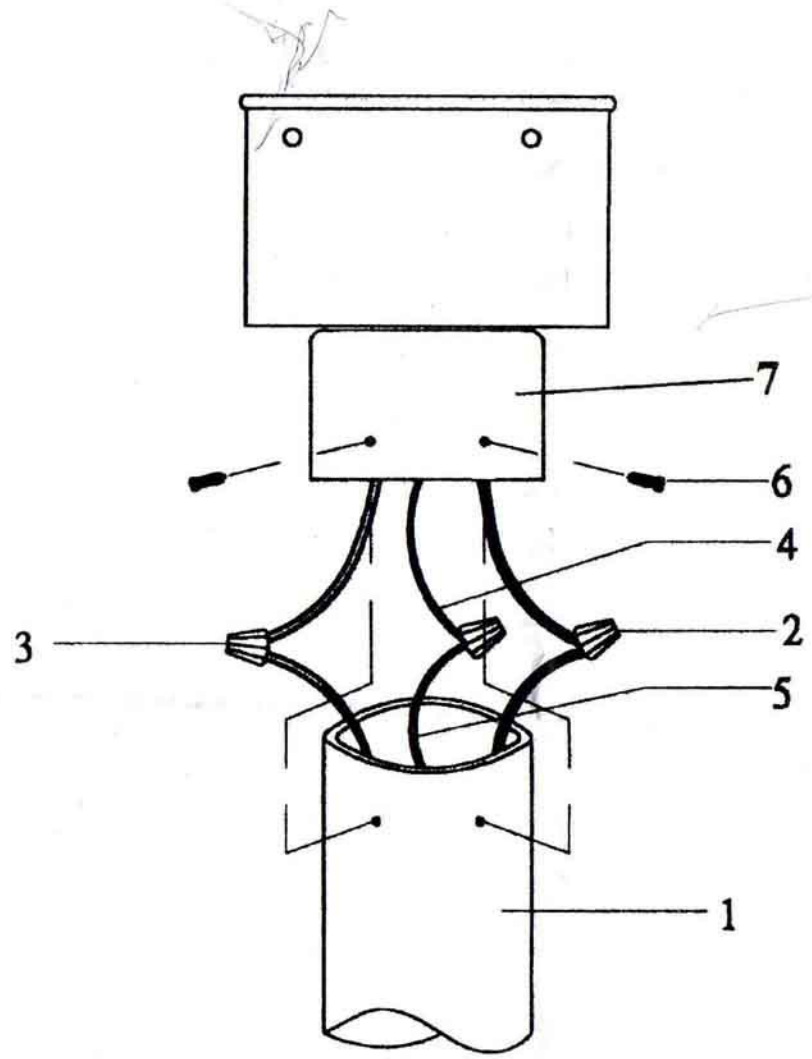

1. POSTE TUBULAR
2. CONEXION DE ALAMBRES NEGROS
3. CONEXION DE ALAMBRES BLANCOS
4. ALAMBRE A TIERRA DE LA LAMPARA
5. ALAMBRE A TIERRA DE LA CAJA DE CONEXIONS
6. TORNILLO DE MONTAJE
7. COPA